


The RF Line High Output Power Doubler 750 MHz CATV Amplifiers

Designed specifically for 750 MHz CATV applications. Features ion-implanted, arsenic emitter transistors with an all gold metallization system.

- Supply Voltage = 24 Vdc
- 6th Generation Die Technology
- Specified for 110 Channel Performance
- Broadband Power Gain @ $f = 50$ MHz
Gp = 18 dB Min (MHW7185A)
Gp = 19.5 dB Min (MHW7205A)
- Broadband Noise Figure @ $f = 50$ MHz
NF = 6 dB Max
- Improvement in Distortion Over Conventional Hybrids
- Allows Higher Output Level Operation

MHW7185A
MHW7205A

750 MHz, 24 Vdc
110 CHANNEL
CATV AMPLIFIERS



CASE 714-06, Style 1


ABSOLUTE MAXIMUM RATINGS

Rating	Symbol	Value	Unit
DC Supply Voltage	V_{CC}	+28	Vdc
RF Input Voltage (Single Tone)	V_{IN}	+70	dBmV
Operating Case Temperature Range	T_C	- 20 to +100	°C
Storage Temperature Range	T_{stg}	- 40 to +125	°C

ELECTRICAL CHARACTERISTICS ($V_{CC} = 24$ Vdc, $T_C = 30^\circ\text{C}$, 75 Ω system, unless otherwise noted)

Characteristic	Symbol	Min	Max	Unit
Bandwidth	BW	40	750	MHz
Power Gain (f = 50 MHz)	Gp1	18.0 19.5	19.0 20.5	dB
Power Gain (f = 750 MHz)	Gp2	18.5 20.0	20.5 21.5	dB
Slope (f = 40 – 750 MHz)	S	0	2	dB
Gain Flatness (f = 40 – 750 MHz, Peak to Valley)	G_f	—	1	dB
Return Loss (f = 40 MHz)	RL	18	—	dB
Return Loss Derate (f > 40 MHz)	RLD	—	0.007	dB/MHz
Composite Triple Beat ($V_{out} = +44$ dBmV/ch, 110 Channels, Worst Case)	CTB ₁₁₀	— —	-58 -57	dBc
Cross Modulation ($V_{out} = +44$ dBmV/ch, 110 Channels, FM = 55 MHz)	XMD ₁₁₀	—	-65 -64	dBc
Composite Second Order ($V_{out} = +44$ dBmV/ch, 110 Channels, Worst Case)	CSO ₁₁₀	— —	-58 -56	dBc
Noise Figure (f = 50 MHz)	NF ₁	—	6	dB
Noise Figure (f = 750 MHz)	NF ₂	—	8.5	dB
DC Current	IDC	380	460	mA

PACKAGE DIMENSIONS

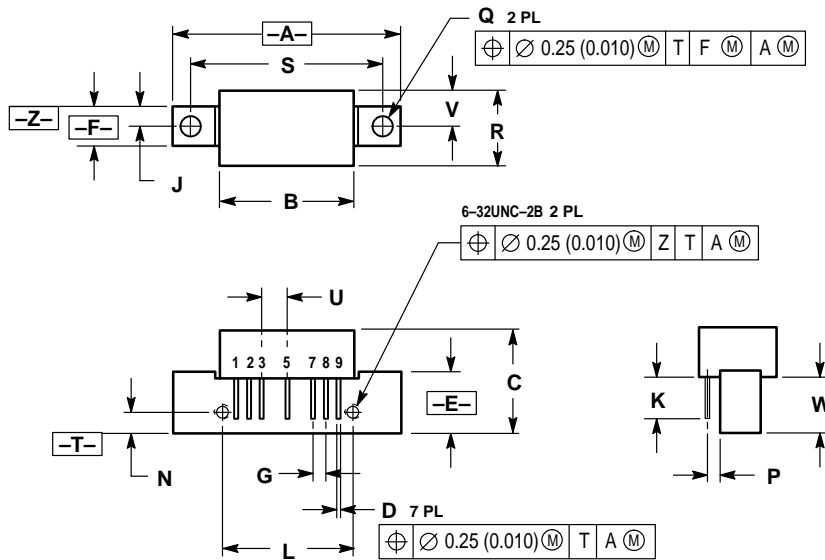

NOTES:


1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
2. CONTROLLING DIMENSION: INCH.

DIM	INCHES		MILLIMETERS	
	MIN	MAX	MIN	MAX
A	—	1.775	—	45.08
B	—	1.085	—	27.56
C	—	0.840	—	21.34
D	0.018	0.022	0.46	0.56
E	0.465	0.510	11.81	12.95
F	0.300	0.325	7.62	8.25
G	0.100 BSC	—	2.54 BSC	—
J	0.156 BSC	—	3.96 BSC	—
K	0.315	0.355	8.00	8.50
L	1.00 BSC	—	25.40 BSC	—
N	0.165 BSC	—	4.10 BSC	—
P	0.100 BSC	—	2.54 BSC	—
Q	0.148	0.168	3.76	4.27
R	—	0.595	—	15.11
S	1.500 BSC	—	38.10 BSC	—
U	0.200 BSC	—	5.08 BSC	—
V	0.280 BSC	—	7.11 BSC	—
W	0.435	0.450	11.05	11.43

STYLE 1:

- PIN 1. RF INPUT
- GROUND
- GROUND
- DELETED
- VDC
- DELETED
- GROUND
- GROUND
- RF OUTPUT

CASE 714-06 ISSUE K

Motorola reserves the right to make changes without further notice to any products herein. Motorola makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does Motorola assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation consequential or incidental damages. "Typical" parameters can and do vary in different applications. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. Motorola does not convey any license under its patent rights nor the rights of others. Motorola products are not designed, intended, or authorized for use as components in systems intended for surgical implant into the body, or other applications intended to support or sustain life, or for any other application in which the failure of the Motorola product could create a situation where personal injury or death may occur. Should Buyer purchase or use Motorola products for any such unintended or unauthorized application, Buyer shall indemnify and hold Motorola and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that Motorola was negligent regarding the design or manufacture of the part. Motorola and  are registered trademarks of Motorola, Inc. Motorola, Inc. is an Equal Opportunity/Affirmative Action Employer.

How to reach us:

USA/EUROPE: Motorola Literature Distribution;
P.O. Box 20912; Phoenix, Arizona 85036. 1-800-441-2447

MFAX: RMFAX0@email.sps.mot.com – TOUCHTONE (602) 244-6609
INTERNET: <http://Design-NET.com>

JAPAN: Nippon Motorola Ltd.; Tatsumi-SPD-JLDC, Toshikatsu Otsuki,
6F Seibu-Butsuryu-Center, 3-14-2 Tatsumi Koto-Ku, Tokyo 135, Japan. 03-3521-8315

HONG KONG: Motorola Semiconductors H.K. Ltd.; 8B Tai Ping Industrial Park,
51 Ting Kok Road, Tai Po, N.T., Hong Kong. 852-26629298



MOTOROLA

MHW7185A/D



This datasheet has been download from:

www.datasheetcatalog.com

Datasheets for electronics components.