


NMXU Series

Isolated 5W Single & Dual Output DC/DC Converters

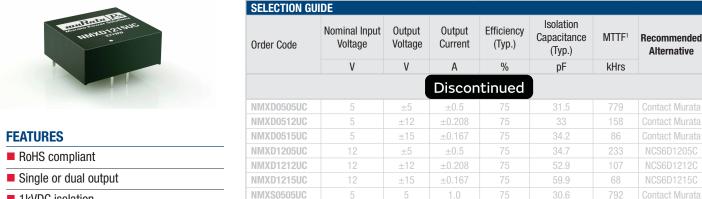

NMXS0512UC

NMXS0515UC NMXS1205UC

NMXS1212UC

NMXS1215UC

When operated with additional external load capacitance the rise time of the input voltage will determine the maximum external capacitance value for guaranteed start up. The slower the rise time of the input voltage the greater the maximum value of the additional external capacitance for reliable start up.

INPUT CHARACTERIST	ICS				
Parameter	Conditions	Min.	Тур.	Max.	Units
Voltago rongo	Continuous operation, 5V input types	4.5	5.0	5.5	V
Voltage range	Continuous operation, 12V input types	10.8	12.0	13.2	V
Reflected ripple voltage	BW=DC to 20MHz, all output types			200	mV

OUTPUT CHARACTERIST	rics				
Parameter	Conditions	Min.	Тур.	Max.	Units
Rated Power	T _A = 0°C to 70°C			5.0	W
Voltage Set Point Accuracy	See tolerance envelope				
Line regulation	High Vin to low Vin		1.1		%/%
Load Population	10% load to rated load, 5V output types		7	12	%
Load Regulation	10% load to rated load, 12V & 15V output types		5	7.5	70
Ripple and Noise	BW=DC to 20MHz, all output types			125	mV p-p

ABSOLUTE MAXIMUM RATINGS		
Short-circuit protection ²	1 second	
Lead temperature 1.5mm from case for 10 seconds	300°C	
Input voltage V _{IN} , NMXU05 types	7V	
Input voltage V _{IN} , NMXU12 types	15V	

- 1. Calculated using MIL-HDBK-217F with nominal input voltage at full load.
- 2. Supply voltage must be disconnected at the end of the short circuit duration. All specifications typical at Ta=25°C, nominal input voltage and rated output current unless otherwise specified.



- 1kVDC isolation
- Pin compatible with NMXSO series
- Power density 0.85W/cm³
- UL 94V-0 package material
- Footprint 5.88cm²
- Industry standard pinout
- 5V & 12V input
- 5V, 12V & 15V output
- No heatsink required
- Internal SMD construction
- Fully encapsulated with toroidal magnetics
- No external components required
- PCB mounting

DESCRIPTION

The NMXU series of DC/DC converters is particularly suited to isolating and/or converting DC power rails. The galvanic isolation allows the device to be configured to provide an isolated negative rail in systems where only positive rails exist. The devices are particularly suited for use in distributed power systems where there is low variation in the bus voltage levels.








NMXU Series

Isolated 5W Single & Dual Output DC/DC Converters

ISOLATION CHARACTERIS	STICS				
Parameter	Conditions	Min.	Тур.	Max.	Units
Isolation test voltage	Flash tested for 1 second	1000			VDC
Resistance	Viso= 1000VDC	1			GΩ

GENERAL CHARACTERISTIC	S				
Parameter	Conditions	Min.	Тур.	Max.	Units
Switching frequency	All input types		70		kHz

TEMPERATURE CHARACTER	HISTICS				
Parameter	Conditions	Min.	Тур.	Max.	Units
Specification	All output types	0		70	
Storage		-55		100	°C
Case temperature rise above	5V output types		30		U
ambient	All other output types		20		
Cooling	Free air convection				

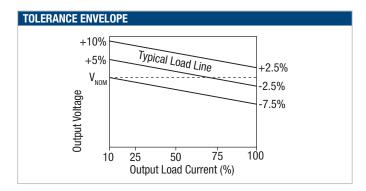

Rohs Compliance Information



This series is compatible with RoHS soldering systems with a peak wave solder temperature of 300°C for 10 seconds. The pin termination finish on this product series is Matte Tin over Nickel Preplate. The series is backward compatible with Sn/Pb soldering systems.

For further information, please visit www.murata-ps.com/rohs

TECHNICAL NOTES

ISOLATION VOLTAGE

'Hi Pot Test', 'Flash Tested', 'Withstand Voltage', 'Proof Voltage', 'Dielectric Withstand Voltage' & 'Isolation Test Voltage' are all terms that relate to the same thing, a test voltage, applied for a specified time, across a component designed to provide electrical isolation, to verify the integrity of that isolation.

Murata Power Solutions NMXU series of DC/DC converters are all 100% production tested at their stated isolation voltage. This is 1kVDC for 1 second.

A question commonly asked is, "What is the continuous voltage that can be applied across the part in normal operation?"

For a part holding no specific agency approvals, such as the NMXU series, both input and output should normally be maintained within SELV limits i.e. less than 42.4V peak, or 60VDC. The isolation test voltage represents a measure of immunity to transient voltages and the part should never be used as an element of a safety isolation system. The part could be expected to function correctly with several hundred volts offset applied continuously across the isolation barrier; but then the circuitry on both sides of the barrier must be regarded as operating at an unsafe voltage and further isolation/insulation systems must form a barrier between these circuits and any user-accessible circuitry according to safety standard requirements.

REPEATED HIGH-VOLTAGE ISOLATION TESTING

It is well known that repeated high-voltage isolation testing of a barrier component can actually degrade isolation capability, to a lesser or greater degree depending on materials, construction and environment. The NMXU series has toroidal isolation transformers, with no additional insulation between primary and secondary windings of enameled wire. While parts can be expected to withstand several times the stated test voltage, the isolation capability does depend on the wire insulation. Any material, including this enamel (typically polyurethane) is susceptible to eventual chemical degradation when subject to very high applied voltages thus implying that the number of tests should be strictly limited. We therefore strongly advise against repeated high voltage isolation testing, but if it is absolutely required, that the voltage be reduced by 20% from specified test voltage.


This consideration equally applies to agency recognized parts rated for better than functional isolation where the wire enamel insulation is always supplemented by a further insulation system of physical spacing or barriers.



NMXU Series

Isolated 5W Single & Dual Output DC/DC Converters

PACKAGE SPECIFICATIONS

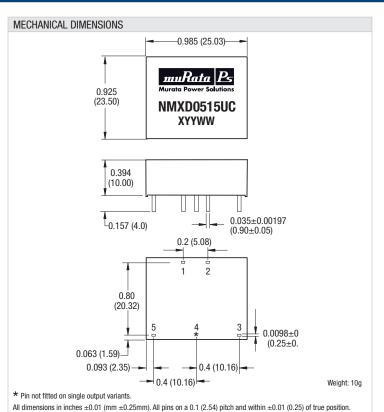



5

Not fitted

 $-V_{\text{OUT}}$

Dual Ou	tput Variants		
Pin	Pin Function		
1	Vin		
2	+Vin		
3	+V out		
4	Common		
5	-Vout		

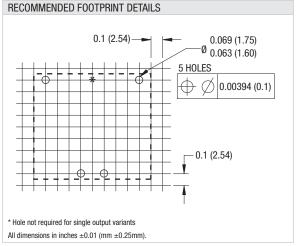

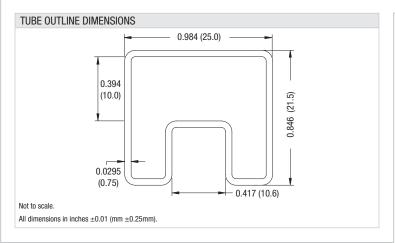

Murata Power Solutions, Inc. 11 Cabot Boulevard, Mansfield, MA 02048-1151 U.S.A. ISO 9001 and 14001 REGISTERED



This product is subject to the following <u>operating requirements</u> and the <u>Life and Safety Critical Application Sales Policy</u>:

Refer to: http://www.murata-ps.com/requirements/

Murata Power Solutions, Inc. makes no representation that the use of its products in the circuits described herein, or the use of other technical information contained herein, will not infringe upon existing or future patent rights. The descriptions contained herein do not imply the granting of licenses to make, use, or sell equipment constructed in accordance therewith. Specifications are subject to change without notice.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Murata:

<u>NMXD0505UC NMXD0512UC NMXD0515UC NMXD1205UC NMXD1212UC NMXD1215UC NMXS0505UC NMXS0512UC NMXS0515UC NMXS1205UC NMXS1212UC NMXS1215UC NMXS1215UC NMXS0505UC NMXS1215UC NMXS0505UC NMXS1215UC NMXS0505UC NMXS1215UC NMXS0505UC NMXS0505UC</u>